

Fitness floors with energy.

EVERLAST®
PERFORMANCE FLOORING

THE TOUGHEST FLOOR IN THE GYM.™

1.888.383.7655 • www.everlastflooring.com

What's New?

We've pumped up the entire line of EVERLAST Performance Flooring to 40 exciting color combinations. Our new line is designed to coordinate with the latest in fitness interior trends, and includes warmer earth tones, bolder blues and a greater selection of grays. What a way to energize your gym!

Made from the highest quality recycled rubber and colorful ColorMill® EPDM flecks, and manufactured by ECORE International™, EVERLAST is available in traditional rolls and tiles, plus our modular UltraTile. It works in any fitness area including weight rooms, cardio areas, performance training centers and spinning rooms - even offices and corridors.

With a rapid response time from just days for standard orders to weeks for custom, EVERLAST Performance Flooring has an expansive service, installation and support network throughout the U.S.A. Contact us today and learn why EVERLAST is the market leader in recycled rubber flooring systems in North America.


Rolls and Tiles

Our roll goods mean easy and fast installation and a virtually seamless appearance. Our 3' x 3' tiles are the ideal choice for smaller areas or for adding splashes of color throughout your facility. In addition to 28 standard colors, custom colors and logos are available to add even more excitement to your gym.


EVERLAST energizes your gym without breaking your budget. It's super durable, which means it can withstand the punishment of weights and heavy foot traffic. This makes it outlast most traditional fitness flooring options, resulting in less replacement costs saving you time and money.

Roll and Tile Benefits


- Most color choices in the industry
- Qualifies for LEED® credits
- Sound and shock absorbent
- Easy installation and maintenance
- Slip resistant wet or dry
- Seamless appearance (rolls)
- Extremely durable
- Custom cut lengths
- Custom colors and logos
- Low life cycle costs
- Odorless
- Made in the U.S.A.

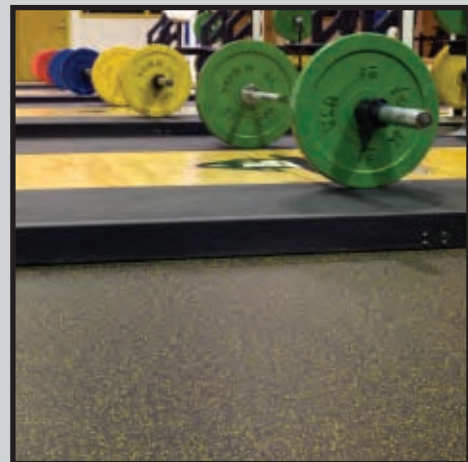

Performance training centers

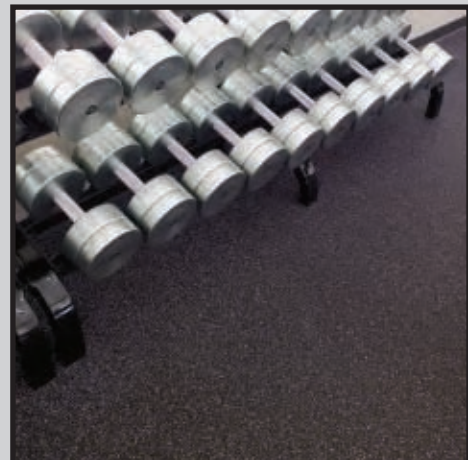

Weight rooms

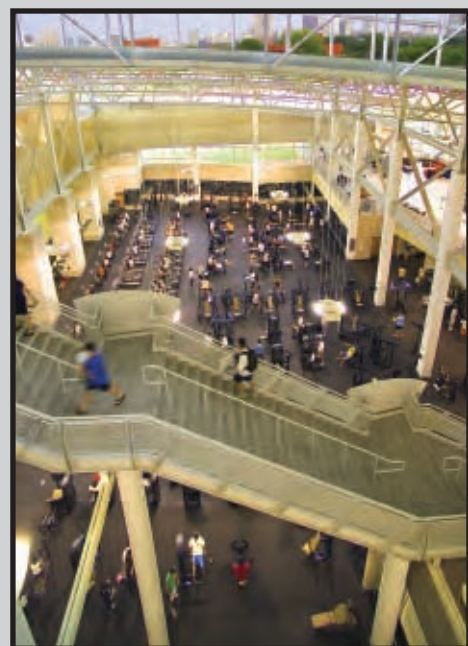


Fitness centers






EVERLAST Roll and Tile Color Line


FUNDAMENTALS - 3/8" (9 mm) - standard
- 1/4" (6 mm) - EL00, EL01 & EL02 standard; other colors special order*




Basic Black EL00




Buff Blue EL01




Grippin' Grey EL02




Buff Blue/Grey EL04




Rippin' Red EL05




Yellow Surge EL07



Brick Red EL21



Gold Fever EL28




Vitamin C EL29



Gym Brown EL30




Aloe Vera EL31




Green Tea EL32


HIGH INTENSITY - 3/8" (9 mm) - standard
- 1/4" (6 mm) - EL45 & EL46 standard; other colors special order*




Buff Blue EL45




Grippin' Grey EL46




Rippin' Red EL47




Rippin' Red/Grey EL06




Pumpin' Purple EL09




Goin' for Gold EL23




B'nana Boat EL33



Top Guns EL34




Feel the Burn EL35




Peanut Crunch EL36


COLOR RUSH - 3/8" (9 mm) - standard
- 1/4" (6 mm) - special order*




Motion Mix EL11




Goin' for Gold/Grey EL24




Heavy Metal EL37



Blue Steel EL38





Just Beet It! EL39



Protein Shake EL40

Dimensions

Rolls		48" x 1/4" (6 mm*)
		48" x 3/8" (9 mm standard)
Tiles		36" x 36" x 1/4" (6 mm*)
		36" x 36" x 3/8" (9 mm standard)

UltraTile™

Looks, flexibility, strength and comfort... UltraTile has it all.

Designed with a patented "Ultra" wear layer to provide unlimited design options, EVERLAST UltraTiles offer a new brand of visual excitement to any club interior. Available in 12 standard designs, UltraTile colors coordinate with fitness equipment as well as other flooring options. Plus these good looking tiles feature a pedestal underside, preventing unsightly cable clutter by routing fitness equipment wiring beneath the surface.

Our modular, 2' x 2' x 1" tiles can be laid over your existing floor, saving you time and money. They're easier and faster to install than traditional glue down floors because no adhesive is needed. Plus its unique dowel rod fastening system gives you the ability to quickly move or replace tiles as desired.

And did we say durable? These 1" thick footed tiles are engineered to provide the ultimate in durability. They also surpass the noise and shock absorptive qualities of any other fitness floor. UltraTile can withstand the constant dropping of weights and pounding of equipment without showing wear and tear.

For trainers on their feet all day, UltraTile provides welcome relief from traditional hard surface flooring. The pedestal underside provides the perfect blend of comfort – cushioned, yet supportive. Your staff and members will thank you.


Aesthetically pleasing, totally modular, extremely durable and comfortable. How can you top that?

UltraTile Benefits


- 2' x 2' x 1" tiles
- Extremely durable
- Modular
- Sound and shock absorbent
- Slip resistant wet or dry
- Custom colors and logos
- Easy installation and maintenance
- Low life cycle costs
- Qualifies for LEED® credits
- Odorless
- Made in the U.S.A.




Selectorized areas

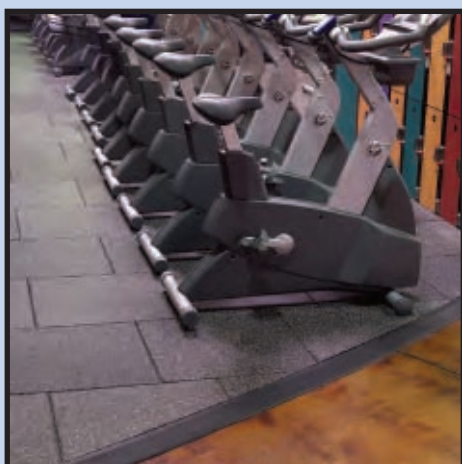

Cardio areas

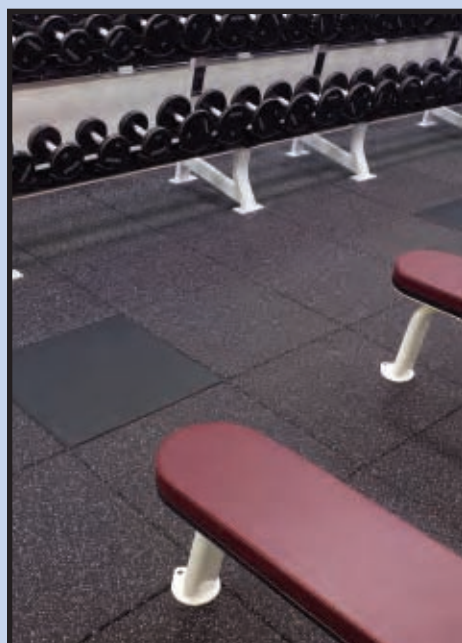


Weight rooms

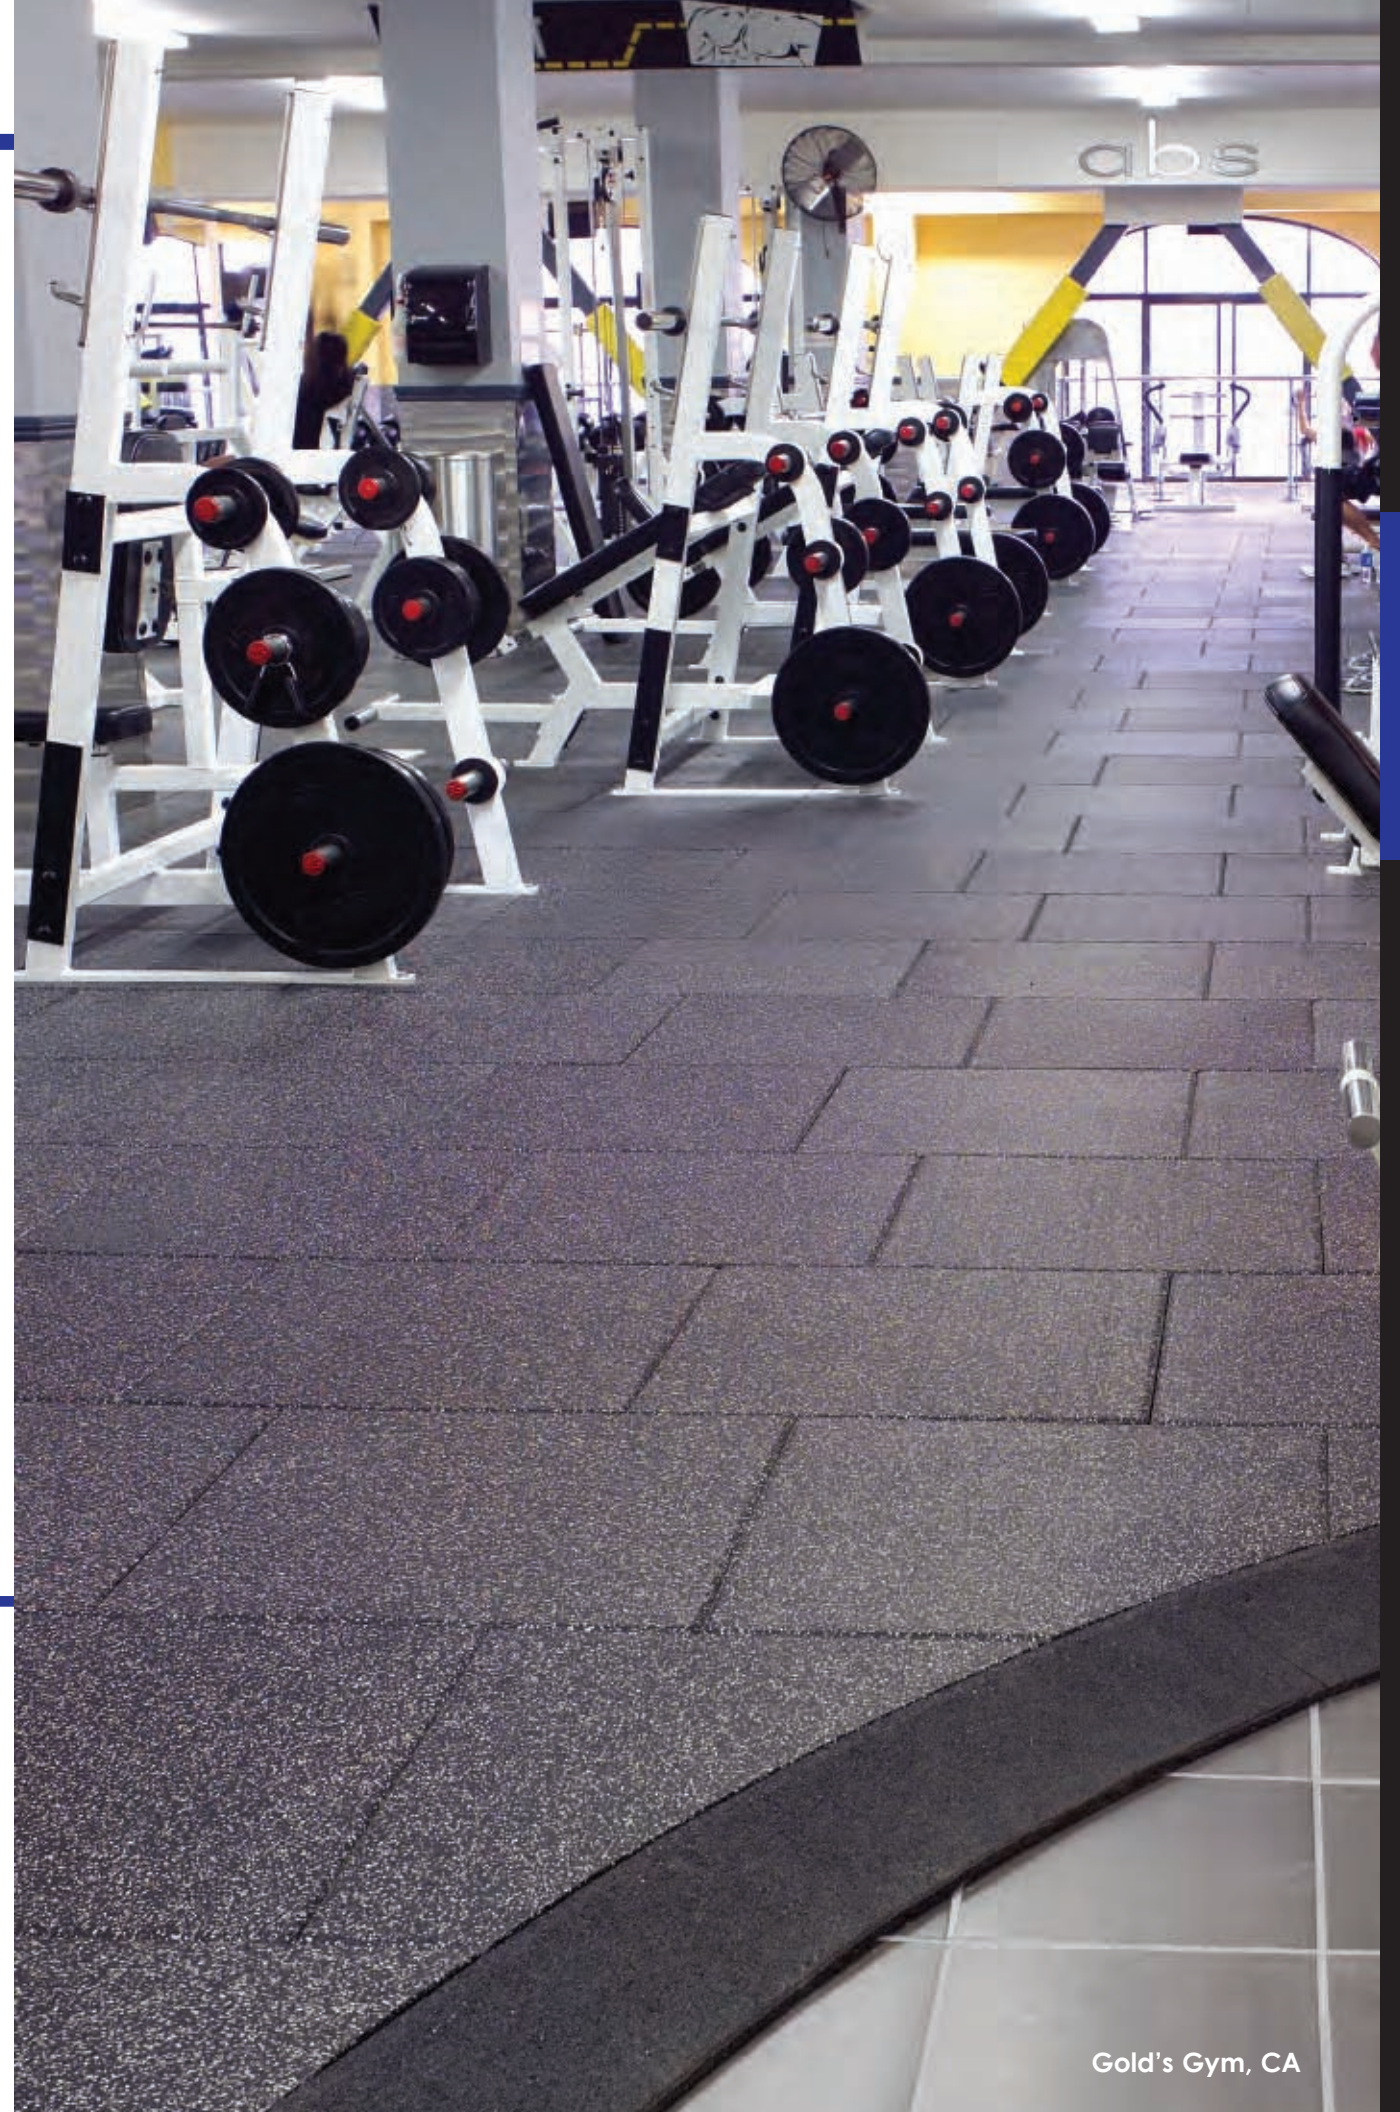





EVERLAST UltraTile Color Line




Basic Black EL00




Buff Blue EL45




Grippin' Grey EL46




Buff Blue/Grey EL48




Rippin' Red EL47



Peanut Crunch EL36



Goin' for Gold/Grey EL24



Steel Appeal EL15




Workout Shark EL41



Iron Flex EL42




Mocha Latte EL43




Tan Lines EL44

Dimensions

UltraTiles 24" x 24" x 1" thick



EVERLAST UltraTile Reducers

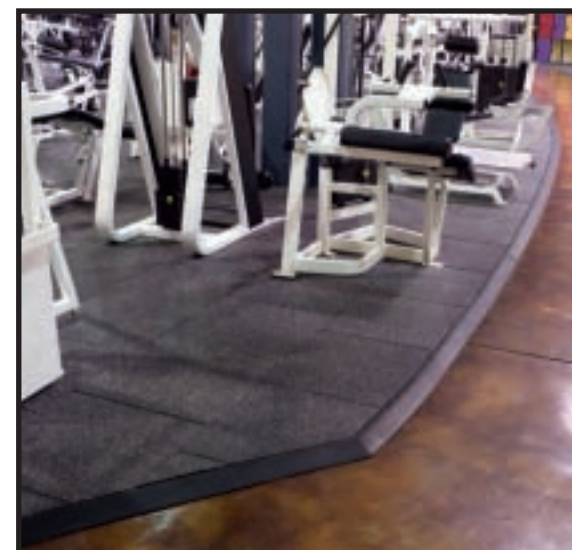


UltraTile with reducer, Gold's Soma Club, CA

UltraTile reducers are available in 12 standard colors to match the UltraTile line, and enable a smooth, beautiful transition to other floor coverings.

Dimensions

Reducers 48" x 4" x 1" thick



EVERLAST Custom Colors and Logos

Show Your True Colors

Custom colors and logos are a great way to customize your gym or showcase your school spirit. And with EVERLAST's custom color palette of over 30 color granules, the possibilities are endless.

Only EVERLAST Performance Flooring is made with ColorMill EPDM, the finest color granules on the market. Manufactured exclusively by ECORE, ColorMill is made from the highest quality materials to provide the best UV stability and abrasion resistance. A state-of-the-art production process ensures color vividness, no odor and a smooth finish.



EVERLAST logos are custom designed to your requirements utilizing state-of-the-art water-jet cutting equipment. Create focal points in lobbies, entryways or special purpose areas with motivating logos or symbols. Logos come in a variety of sizes and can be installed with your new or existing EVERLAST floor. Contact your EVERLAST rep for detailed custom color and logo requirements.



Baltimore Ravens' logo, MD



Allegheny College training center, PA



Manheim Central High School, PA

Technical Information



PRODUCT DIMENSIONS

EVERLAST Rolls	Thickness	Weight (lbs./sq. ft.)	
48" width	6 mm (1/4")	1.25	
48" width	9 mm (3/8")	1.95	
EVERLAST Tiles	Coverage (sq. ft./tile)	Weight (lbs./sq. ft.)	Weight (lbs./tile)
36" x 36" x 6 mm (1/4")	9.0	1.25	11.25
36" x 36" x 9 mm (3/8")	9.0	1.95	17.55
EVERLAST UltraTile	Coverage (sq. ft./tile)	Weight (lbs./sq. ft.)	Weight (lbs./tile)
24" x 24" x 25 mm (1")	4	4	16
EVERLAST UltraTile Reducer	Coverage (linear ft.)	Weight (lbs./pc.)	
48" x 4" x 1"	4	5	

PHYSICAL DATA TEST

	ASTM	EVERLAST SBR Rubber	UltraTile
Tensile Strength	D412	200 lb/in ² min	200 lb/in ² min
Flexibility	F137	Pass 1/4 inch mandrel	N/A
Coefficient of Friction	D2047	>0.9	>0.9
Thermal Conductivity	C518	0.406 Btu-in/hr-ft ² -°F	0.400 Btu-in/hr-ft ² -°F (approx)
Static Load Limit	F970, 1,000 lbs.	<0.020 in	Not determined
Chemical Resistance	F925	No change	No change
Impact Insulation Class	E49	45 min	>50
Noise Reduction Coefficient	C423	0.10 sabine/ft ²	0.10 sabine/ft ²
Elongation at Break	D412	75% min	75% min

TECHNICAL INFORMATION

INSTALLATION – EVERLAST rolls, tiles and UltraTile have a range of installation methods, from easy “install with your own staff” techniques to more permanent and professionally installed full-spread adhesive systems. For more detailed installation recommendations, please request an EVERLAST Installation and Maintenance Manual. For information on outdoor installation, please call 1-888-383-7655.

ADHESIVE – ECORE developed E-Grip™II, an easy-to-use one-part polyurethane adhesive, for adhering EVERLAST flooring to various substrates with moisture content up to 5.5 lbs. Only an ECORE approved adhesive should be used. E-Grip II's coverage is approximately 95 sq. ft./ga.l (1/16" square notch trowel) depending on substrate conditions and is available in 2.5 or 5 gallon pails.

MAINTENANCE – For “Fundamentals” or “High Intensity” color applications, most installations require only routine vacuuming and wet mopping with clean water and mild detergent or pH neutral solution. For “Custom Logo” color applications – protective coating and regular upkeep will assure long-lasting appearance and resistance to normal wear and tear and foot traffic. Taski® floor care and maintenance products, available nationally, offer simple and reliable protection and performance. For more detailed information, please request an EVERLAST Installation and Maintenance Manual.

WARRANTY – All ECORE flooring is guaranteed by ECORE to be free from manufacturing defects on both material and workmanship. If such a defect is discovered, the customer must notify ECORE either through the contracting installer, distributor or directly. If found to be defective within three years under normal non-abusive conditions, the sole remedy against the seller will be the replacement or repair of the defective goods, or at the seller's option, credit may be issued not exceeding the selling price of the defective goods.

EVERLAST Performance Flooring...the ultimate fitness flooring solution!



**Extreme durability
and comfort for
weight rooms,
training centers
and fitness clubs.**

Back and front: Lawrenceville Gold's Gym, NJ

EVERLAST[®]
PERFORMANCE FLOORING
THE TOUGHEST FLOOR IN THE GYM.™

1.888.383.7655 • www.everlastflooring.com

Manufactured by:

ecore[™]
— INTERNATIONAL —